



F00RJ02219 Injector Nozzle Nut Technical Data

SKU1: G1N1F00RJ02219

SKU2: G1Y2F00RJ02219

G2

G3

G4

CR



DIESEL

Series Injector Nozzle Nut

0445110 0445120 0414 Piezo

F00RJ02219 Injector Nozzle Nut Technical Data

Content

1. F00RJ02219 Injector Nozzle Nut Introduction.....	2
1.1. F00RJ02219 Injector Nozzle Nut Basic Information.....	2
1.2. F00RJ02219 Injector Nozzle Nut Common Part Number.....	2
1.3. F00RJ02219 Injector Nozzle Nut Parameter	5
1.4. F00RJ02219 Injector Nozzle Nut Specifications and Dimensions Parameter	5
1.5. F00RJ02219 Injector Nozzle Nut Quality Control.....	5
1.6. F00RJ02219 Injector Nozzle Nut Customized Service.....	5
1.7. F00RJ02219 Injector Nozzle Nut Packing List & Size.....	6
1.8. F00RJ02219 Injector Nozzle Nut Testing Standard and Certificate.....	7
1.9. F00RJ02219 Injector Nozzle Nut Warranty Instructions	8
1.10. F00RJ02219 Injector Nozzle Nut Storage Standard	9
1.11. F00RJ02219 Injector Nozzle Nut Manufacturer	10
2. F00RJ02219 Injector Nozzle Nut Technical Support	10
2.1. F00RJ02219 Injector Nozzle Nut Utilized Location	10
2.2. F00RJ02219 Injector Nozzle Nut Installation	11
2.3. Reasons of F00RJ02219 Injector Nozzle Nut Not Working Normally.....	12
2.4. Causes of F00RJ02219 Injector Nozzle Nut Being Damaged.....	12
2.5. F00RJ02219 Injector Nozzle Nut Technical Support Obtaining Methods	13
2.6. F00RJ02219 Injector Nozzle Nut Measurement Tool.....	13
2.7. F00RJ02219 Injector Nozzle Nut Measurement Steps.....	13
3. F00RJ02219 Injector Nozzle Nut Purchase and Delivery	15
3.1. F00RJ02219 Injector Nozzle Nut Purchase Payment Term	15
3.2. F00RJ02219 Injector Nozzle Nut Main Sales Markets.....	15
3.3. F00RJ02219 Injector Nozzle Nut Declaration Requirements	15
3.4. F00RJ02219 Injector Nozzle Nut Shipping Ways.....	15
3.5. F00RJ02219 Injector Nozzle Nut Lead time	15
3.6. F00RJ02219 Injector Nozzle Nut Logistics Time for Destination Out of China' s Areas.....	15
3.7. F00RJ02219 Injector Nozzle Nut Injection Packing.....	16
4.F00RJ01101 Injector Nozzle Nut Storage Standard	17
5.Company Information.....	17
5.1. Company Introduction.....	18
5.2. Contact Information	18
6.Copyright Statement.....	19

F00RJ02219 Injector Nozzle Nut Technical Data**1. F00RJ02219 Injector Nozzle Nut Introduction****1.1. F00RJ02219 Injector Nozzle Nut Basic Information**

Injector Nozzle Nut Title	Common Rail F00RJ02219 Injector Nozzle Nut China Made New
SKU1	G1N1F00RJ02219
SKU2	G1Y2 F00RJ02219

1.2. F00RJ02219 Injector Nozzle Nut Common Part Number**(1) Injector Nozzle Nut Applicable Injector Model**

Injector Part Number	Injector Part Number	Injector Part Number	Injector Part Number
0445120025	0445120031	0445120042	0445120045
0445120074	0445120081	0445120086	/

(2) Injector Nozzle Nut Application Information

Brand	Car Model	Engine Model	OE Part Number
FORD	Cargo 1830	ECOTORQ 300	2C246 9F593 AA
MAN	TGA 41.660 VF	D 2840 LF25	51 10100 6026
CHEVROLET	Express 2500 6.6	LLY	97780474
MAN	12.240 HOCL-NL	D 0836 LOH41	51 10100 6050
KAVZ KURGAN	4238	TCD 2013 L04 4V	04902525
FAW	/	CA4DF_EU3	1112010B470-0000
FOTON (BEIJING FUTIAN ENVIR.)	Auman 11.6 D	WD618_EU3	612630090001

(3) Injector Nozzle Nut Part Number Common Writing

0445120070, 0445120081, 0445120083, 0445120086, 0445120087, 0445120102, 0445120110, 0445120117, 0445120121, 0445120122, 0445120127, 0445120129, 0445120130, 0445120134, 0445120149, 0445120150, 0445120159, 0445120170, 0445120200, 0445120215, 0445120225, 0445120227, 0445120228, 0445120241, 0445120244, 0445120261, 0445120266, 0445120277, 0445120318, 0445120321, 0445120324, 0445120333, 0445120343, 0445120347, 0445120348, 0445120352, 0445120357, 0445120361, 0445120364, 0445120368, 0445120371, 0445120372, 0445120379, 0445120380, 0445120381, 0445120382, 0445120391, 0445120397, 0445120399, 0445120400, 0445120402, 0445120403, 0445120416, 0445120439, 0445120472, 0445120013, 0445120017, 0445120024, 0445120025, 0445120027, 0445120029, 0445120030, 0445120031, 0445120035, 0445120037, 0445120038, 0445120040, 0445120041, 0445120042, 0445120043, 0445120044, 0445120045, 0445120053, 0445120055, 0445120056, 0445120058, 0445120061, 0445120062, 0445120063, 0445120064, 0445120065, 0445120068, 0445120070, 0445120074,

0445120077, 0445120080, 0445120081, 0445120082, 0445120083, 0445120086, 0445120087,
0445120089, 0445120094, 0445120097, 0445120098, 0445120099, 0445120100, 0445120102,
0445120105, 0445120107, 0445120109, 0445120110, 0445120112, 0445120115, 0445120116,
0445120117, 0445120118, 0445120120, 0445120121, 0445120122, 0445120125, 0445120127,
0445120128, 0445120129, 0445120130, 0445120131, 0445120133, 0445120134, 0445120135,
0445120136, 0445120137, 0445120138, 0445120139, 0445120140, 0445120141, 0445120143,
0445120144, 0445120145, 0445120146, 0445120147, 0445120148, 0445120149, 0445120150,
0445120153, 0445120154, 0445120155, 0445120156, 0445120160, 0445120162, 0445120163,
0445120164, 0445120167, 0445120168, 0445120169, 0445120170, 0445120178, 0445120179,
0445120180, 0445120186, 0445120191, 0445120192, 0445120196, 0445120197, 0445120199,
0445120200, 0445120201, 0445120202, 0445120203, 0445120213, 0445120214, 0445120215,
0445120217, 0445120218, 0445120219, 0445120220, 0445120222, 0445120224, 0445120225,
0445120226, 0445120227, 0445120228, 0445120229, 0445120233, 0445120234, 0445120235,
0445120236, 0445120237, 0445120240, 0445120241, 0445120244, 0445120245, 0445120246,
0445120253, 0445120257, 0445120258, 0445120260, 0445120261, 0445120265, 0445120266,
0445120268, 0445120272, 0445120277, 0445120278, 0445120280, 0445120290, 0445120291,
0445120292, 0445120293, 0445120294, 0445120295, 0445120296, 0445120297, 0445120304,
0445120305, 0445120311, 0445120313, 0445120315, 0445120316, 0445120317, 0445120318,
0445120320, 0445120321, 0445120324, 0445120326, 0445120327, 0445120330, 0445120331,
0445120333, 0445120334, 0445120340, 0445120341, 0445120343, 0445120344, 0445120345,
0445120347, 0445120348, 0445120352, 0445120353, 0445120354, 0445120355, 0445120357,
0445120360, 0445120361, 0445120362, 0445120363, 0445120364, 0445120368, 0445120370,
0445120371, 0445120372, 0445120373, 0445120376, 0445120377, 0445120379, 0445120380,
0445120381, 0445120382, 0445120389, 0445120391, 0445120392, 0445120394, 0445120397,
0445120399, 0445120400, 0445120402, 0445120403, 0445120405, 0445120406, 0445120410,
0445120416, 0445120419, 0445120424, 0445120439, 0445120442, 0445120443, 0445120447,
0445120448, 0445120449, 0445120450, 0445120457, 0445120458, 0445120459, 0445120461,
0445120462, 0445120468, 0445120472, 0445120481, 0445120500, 0445120524, 0445120530,
0445120533, FOORJ02817, FOORJ02818, FOORJ03591, 0 445 120 013, 0 445 120 017, 0 445 120 024,
0 445 120 025, 0 445 120 027, 0 445 120 029, 0 445 120 030, 0 445 120 031, 0 445 120 035, 0 445 120 037,
0 445 120 038, 0 445 120 040, 0 445 120 041, 0 445 120 042, 0 445 120 043, 0 445 120 044, 0 445 120 045,
0 445 120 053, 0 445 120 055, 0 445 120 056, 0 445 120 058, 0 445 120 061, 0 445 120 062, 0 445 120 063,
0 445 120 064, 0 445 120 065, 0 445 120 068, 0 445 120 070, 0 445 120 074, 0 445 120 077, 0 445 120 080,
0 445 120 081, 0 445 120 082, 0 445 120 083, 0 445 120 086, 0 445 120 087, 0 445 120 089, 0 445 120 094,
0 445 120 097, 0 445 120 098, 0 445 120 099, 0 445 120 100, 0 445 120 102, 0 445 120 105, 0 445 120 107,
0 445 120 109, 0 445 120 110, 0 445 120 112, 0 445 120 115, 0 445 120 116, 0 445 120 117, 0 445 120 118,
0 445 120 120, 0 445 120 121, 0 445 120 122, 0 445 120 125, 0 445 120 127, 0 445 120 128, 0 445 120 129,
0 445 120 130, 0 445 120 131, 0 445 120 133, 0 445 120 134, 0 445 120 135, 0 445 120 136, 0 445 120 137,
0 445 120 138, 0 445 120 139, 0445 120 140, 0 445 120 141, 0 445 120 143, 0 445 120 144, 0 445 120 145,
0 445 120 146, 0 445 120 147, 0 445 120 148, 0 445 120 149, 0 445 120 150, 0 445 120 153, 0 445 120 154,
0 445 120 155, 0 445 120 156, 0 445 120 160, 0 445 120 162, 0 445 120 163, 0 445 120 164, 0 445 120 167,
0 445 120 168, 0 445 120 169, 0 445 120 170, 0 445 120 178, 0 445 120 179, 0 445 120 180, 0 445 120 186,
0 445 120 191, 0 445 120 192, 0 445 120 196, 0 445 120 197, 0 445 120 199, 0 445 120 200, 0 445 120 201,
0 445 120 202, 0 445 120 203, 0 445 120 213, 0 445 120 214, 0 445 120 215, 0445 120 217, 0 445 120 218,
0 445 120 219, 0 445 120 220, 0 445 120 222, 0 445 120 224, 0 445 120 225, 0 445 120 226, 0 445 120 227,

0 445 120 228, 0 445 120 229, 0 445 120 233, 0 445 120 234, 0 445 120 235, 0 445 120 236, 0 445 120 237,
0 445 120 240, 0445 120 241, 0 445 120 244, 0 445 120 245, 0 445 120 246, 0 445 120 253, 0 445 120 257,
0 445 120 258, 0 445 120 260, 0445 120 261, 0 445 120 265, 0 445 120 266, 0 445 120 268, 0 445 120 272,
0 445 120 277, 0 445 120 278, 0 445 120 280, 0 445 120 290, 0 445 120 291, 0 445 120 292, 0 445 120 293,
0 445 120 294, 0 445 120 295, 0 445 120 296, 0 445 120 297, 0 445 120 304, 0 445 120 305, 0 445 120 311,
0 445 120 313, 0 445 120 315, 0 445 120 316, 0 445 120 317, 0 445 120 318, 0 445 120 320, 0 445 120 321,
0 445 120 324, 0 445 120 326, 0 445 120 327, 0 445 120 330, 0 445 120 331, 0 445 120 333, 0 445 120 334,
0 445 120 340, 0 445 120 341, 0 445 120 343, 0 445 120 344, 0 445 120 345, 0 445 120 347, 0 445 120 348,
0 445 120 352, 0 445 120 353, 0 445 120 354, 0 445 120 355, 0 445 120 357, 0 445 120 360, 0 445 120 361,
0 445 120 362, 0 445 120 363, 0 445 120 364, 0 445 120 368, 0 445 120 370, 0 445 120 371, 0 445 120 372,
0 445 120 373, 0 445 120376, 0 445 120 377, 0 445 120 379, 0 445 120 380, 0 445 120 381, 0 445 120 382,
0 445 120 389, 0 445 120 391, 0 445 120 392, 0 445 120 394, 0 445 120 397, 0 445 120 399, 0 445 120 400,
0 445 120 402, 0 445 120 403, 0 445 120 405, 0 445 120 406, 0 445 120 410, 0 445 120 416, 0 445 120 419,
0 445 120 424, 0 445 120 439, 0 445 120 442, 0 445 120 443, 0 445 120 447, 0 445 120 448, 0 445 120 449,
0 445 120 450, 0 445 120 457, 0 445 120 458, 0 445 120 459, 0 445 120 461, 0 445 120 462, 0 445 120 468,
0 445 120 472, 0 445 120 481, 0 445 120 500, 0 445 120 524, 0 445 120 530, 0 445 120 533, F OOR J02 817,
F OOR J02 818, F OOR J03 591, 50 10 450 532, 50 10 450 433, 50 10 450 533, 51 10100 6016,
51 10100 6027, 51 10100 6049, 51 10100 6043, 2C246 9F593 AA, 2C469 F5936 AA, 2C469 F593 AA,
97303657, 8 97303 657 C, 3 965 721, 3 973 060, 4 939 061, 51 10100 6035, 51 10100 6048, 51 10100 6032,
51 10100 6026, 3 965 720, 3 973 059, 3 965 750, 3 965 749, 65.10401-7001, 65.10401-7002, 97361355,
97780474, 8-97361-355-6, 8-97631-355-6, 9 6120 46 4 0014, 2R0 130 201 B, 51 10100 6050,
51 10100 6066, L1 0100-6066, 51 10100 6047, 51 10100 6051, 51 10100 6056, ME 356178, ME355793,
51 10100 6064, 51 10100 6126, 51101006126, V867069326, V 837 069 326, V837069326, 8370 69214,
837069405, V 837 069 405, 8370 69215, 490 2255, 04902825, 04902255, 490 2825, 74 21 006 086,
74 21 006 085, 74 20 806 011, F 339 202 710 060, 04290988, 429 0988, 51 10100 6058, 3 976 631,
4 930 485, 04902525, 490 2525, 74 21 006 073, 74 21 006 084 HA, 21006084, 9 6120 46 4 0024,
2S2 130 200, 1112010B470-0000, 1112010 470, 98002368, 19208742, 8-98002-368-4,
G2100-1112100-A38, 612630090001, 612630090008, 9 6120 46 4 0034, 2T2 130 201, BG6X 9E526 AA,
4 935 675, 2T2 130 201 A, 4 934 411, 51 10100 6065, 51 10100 6070, 51 10100 6079, 51 10100 6127,
51 10100 6063, 13035011, ME 358546, ME357728, J5600-1112100-A38, 875 815 65, 4 940 439, 875 381 23,
4 940 171, 6C46 9F593 A1, 6C469 F593 AA, BG7X 9K526 AA, 4 945 807, 2T2 130 201 D, 4 940 640, 4940640,
4 942 359, 4942359, 4 940 170, 612630090012, 101 171 68, 612600080611, 612600080971,
612600080618, 51 10100 6091, 51 10100 6114, 4 945 463, 4 993 482, 5283275, J5283275A7596,
6C469 F593 BB, 6C469 F593 BA, 74 85 001 663, 74 85 001 662, 74 85 001 662 BX, 74 21 006 084, 4 945 316,
2T2 198 133, 877 080 24, 4 944 476, 51 10100 6085, 51 10100 6086, 13024966, 201149061,
004510411120349088, 51 10100 6102, 51 10100 6107, L4700-1112100-A38, M6000 1112100 A38,
51 10100 6083, 07W 130 205, 61 10100 6083, G5A00 1112100 A38, A6000 1112100 A38, 0305BAV00180N,
9 6120 46 4 0054, 6C46 9F593 AB, 612600080 924, 53401112010, 3005 555 C91, 62101006123,
62.10100-6122, 51 10100 6115, 07W 130 205 A, 13034027, T73302149, 104 900 18, 51 10100 6123,
4 994 541, 612600080972, 51 10100 6128, 51 10100 6121, 51 10100 6090, 51 10100 6131, 612600080924,
51101006126, L1 10100-6126, 51 10100 6125, 51 10100 6124, 612600080964, G1000-1112100-A38,
G6A00-1112100-A38, 612600080977, 612600080978, X57 507 500 024, B9802001, 450 4488, 04504488,
0450 3240, 837073713, V837073713, 843 468 12, 5 263 308, 6745-12-3100, 843 475 19, 5 263 310,
5 263 306, 87538123, 5 263 304, 450 4664, 04504664, 0450 4664, 21773130, 5 263 313, 5 263 230,
BH1X 9K526 BA, 2Z0 130 201, 400903-0031, 13034028, 610800080073, 612630090028, 612640090001,

87581565, 5 263 305, 5263305, 1112010-M10-0000, T832360009, L4700-1112100A-A38, J0100-1112100A-A38, J6A00-1112100-A38, A6A00-1112100-A38, K6000-1112100A-A38, 400903-00036, 5264272, 5 264 272, 2P0 130 201 A, 5 272 937, 5 268 436, 5268436, 6746113100, 51 10100 6155, 51 10100 6154, 51 10100 6148, 51 10100 6147, 1112010-853-0000, K2100-1112100-A38, 200V10100-6126, 1112010-440-0000, 7002581C1, 1112010-470-0000BL, M6000-1112100A-A38, S00005123, 51 10100 6169, 612640080031, 612640080022, T4 10631, 628DB1124006A, 51 10100 6181, 51 10100 6180, 51 10100 6184, VG1034080002, 5801479255, 5801479314, 04511504, 451 1504, 618DB1124006A, T4 13609, S5000-1112100-A38, 610800080588, 400903-00104, C5307809, A2000-1112100-A38, J2000-1112100-A38, EG200-1112100-A38, PAAF072206, T417829, 4499600, T4 17806, 6C46 9F593 AC, E4700-1112100-A38, 5 367 084, 2P0 130 201 B, LVA00-1112100-A38, 04514650, 451 4650, 400903-00157A, PAAF205199, 837086092, 13074417, 1000035955, B6C00501

1.3. F00RJ02219 Injector Nozzle Nut Parameter

Applicable System: Common Rail System

Injector Nozzle Nut Series: 120 Series

Injector Nozzle Nut Type: Electromagnetic Type

Injector Nozzle Nut Dimensions: 21×34.7×M19*0.75

1.4. F00RJ02219 Injector Nozzle Nut Specifications and Dimensions Parameter

Injector Nozzle Nut Size: 6*5*5cm=150cm³ (L*W*H=V)

Single Injector Nozzle Nut Weight: 25g

Injector Nozzle Nut Weight Per Box: 300g

Injector Nozzle Nut Quality: China Made New

Injector Nozzle Nut Package Size: 16cm*10cm*6cm=960cm³ (L*W*H=V)

Injector Nozzle Nut Type: High Pressure Common Rail Injector Nozzle Nut

Injector Nozzle Nut MOQ: 1pcs

1.5. F00RJ02219 Injector Nozzle Nut Quality Control

(1) Injector Nozzle Nut Testing

All parts of the injector nozzle nut have undergone electrical characteristics testing, precision testing, high temperature testing, low temperature testing, withstand pressure testing, leakage testing, durability testing, and various working conditions testing.

(2) Injector Nozzle Nut Installation

In addition, the injector nozzle nut production and installation process is quality controlled. Our company strictly follows the standard product installation data and product installation steps for installation, such as injector nozzle nut stroke test, injector nozzle nut solenoid valve tightening torque, injector nozzle nut nozzle tightening torque.

(3) Injector Nozzle Nut Inspection

The factory inspection of the injector nozzle nut has undergone three inspections: full inspection, random inspection, and batch inspection. Different brands of test benches are used to test the same injector nozzle nut for more than three times for factory inspection, and the fuel injector nozzle nut installation testing environment are progressed in dust-free workshop.

1.6. F00RJ02219 Injector Nozzle Nut Customized Service

(1) Injector Nozzle Nut Customized Service Coverage: Meet OEM manufacturers' customization needs

for shell engraving, logo engraving, injector nozzle nut internal packaging, injector nozzle nut external packaging and labels, etc.

No.	1	2
Image		
Name	Injector Nozzle Nut Packing	Color Customization: Gray, Black, White

(2) Injector Nozzle Nut Customized Service Requirements:

The purchase of customized **injector nozzle nut** is no less than **10 pieces**.

The purchase of customized **injector nozzle nut boxes** is no less than **1000 pieces**.

⚠ When the Customized products involve the need of specify logo, the OEM manufacturer is asked to provide trademark authorization and the sample of logo image file.

⚠ Once the customized injector nozzle nut is sold, it can't be returned or exchanged if there is no quality problems.

1.7. F00RJ02219 Injector Nozzle Nut Packing List & Size

(1) Injector Nozzle Nut Spare Parts List

No.	1	2	3
Image			
Name	Injector Nozzle Nut	Injector Nozzle Nut Height	Injector Nozzle Nut Outer Diameter
Description	/	Height: 34.7mm	Outer diameter: 21mm
No.	4	5	/
Image			/
Name	Injector Nozzle Nut Inside Diameter	Injector Nozzle Nut Lining	/
Description	Inside diameter M19*0.75	Prevent bumping damage to the nozzle nut	/

⚠ Minors are prohibited from using the injector nozzle nut assembly, O-ring, nozzle protective cover, injector nozzle nut shell protective cover, oil return protective cover, VCI anti-rust bag, and bubble bag to avoid personal injury.

- ⚠ O-rings and nozzle washer shim are disposable installation accessories and need to be replaced when installed again.
- ⚠ The nozzle protective cover, injector nozzle nut shell protective cover, and oil return protective cover are recyclable accessories and can be reused.
- ⚠ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.
- ⚠ The injector nozzle nut and the installation part duct must be treated with appropriate sealing oil during installation.

(2) Injector Nozzle Nut Packing Size



Pic No.1

No.	Name	Injector Nozzle Nut Packing Size (cm)
1	Injector Nozzle Nut Box	16*10*6

1.8. F00RJ02219 Injector Nozzle Nut Testing Standard and Certificate

Shumatt can provide the factory quality inspection test report of each injector nozzle nut to ensure that each injector nozzle nut delivered meets the engine performance indicators.

BOTEN		测试报告		4.05.2019 10:42:09																																																
承审企业: _____																																																				
电话: _____ 地址: _____																																																				
传真: _____ 检测人: _____																																																				
客户地址: _____																																																				
电话: _____ 送检单位: _____																																																				
传真: _____ 客户姓名: _____																																																				
检测描述: _____																																																				
检测名称: _____																																																				
型号-零件号: _____																																																				
配置向: _____																																																				
检测结果																																																				
检测编号: C06000-0511																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">检测项目</th> <th style="width: 20%;">参考值范围</th> <th style="width: 20%;">实际值/单位</th> <th style="width: 30%;">检测结果</th> <th style="width: 10%;"></th> </tr> </thead> <tbody> <tr> <td>IGAR TEST:</td> <td>32</td> <td>4</td> <td>6.5</td> <td>20.0 ± 1.0</td> <td>✓</td> </tr> <tr> <td>Rad:</td> <td>32</td> <td>4</td> <td>75</td> <td>40.0 ± 2.0</td> <td>✓</td> </tr> <tr> <td>WPRM:</td> <td>32</td> <td>127.5 ± 16.5</td> <td>0</td> <td>-----</td> <td>✗</td> </tr> <tr> <td>Max:</td> <td>231.5</td> <td>218.5 ± 14.4</td> <td>0</td> <td>-----</td> <td>✓</td> </tr> <tr> <td>TL:</td> <td>28.4</td> <td>24.6 ± 0.5</td> <td>0</td> <td>-----</td> <td>✓</td> </tr> <tr> <td>LL:</td> <td>14.1</td> <td>15.0 ± 0.8</td> <td>0</td> <td>-----</td> <td>✓</td> </tr> <tr> <td>VE:</td> <td>4.7</td> <td>4.0 ± 1.6</td> <td>0</td> <td>-----</td> <td>✓</td> </tr> </tbody> </table>						检测项目	参考值范围	实际值/单位	检测结果		IGAR TEST:	32	4	6.5	20.0 ± 1.0	✓	Rad:	32	4	75	40.0 ± 2.0	✓	WPRM:	32	127.5 ± 16.5	0	-----	✗	Max:	231.5	218.5 ± 14.4	0	-----	✓	TL:	28.4	24.6 ± 0.5	0	-----	✓	LL:	14.1	15.0 ± 0.8	0	-----	✓	VE:	4.7	4.0 ± 1.6	0	-----	✓
检测项目	参考值范围	实际值/单位	检测结果																																																	
IGAR TEST:	32	4	6.5	20.0 ± 1.0	✓																																															
Rad:	32	4	75	40.0 ± 2.0	✓																																															
WPRM:	32	127.5 ± 16.5	0	-----	✗																																															
Max:	231.5	218.5 ± 14.4	0	-----	✓																																															
TL:	28.4	24.6 ± 0.5	0	-----	✓																																															
LL:	14.1	15.0 ± 0.8	0	-----	✓																																															
VE:	4.7	4.0 ± 1.6	0	-----	✓																																															

☐ 接收前
 ☐ 接收后

检测日期: _____
检测地点: _____

Pic No.2

1.9. F00RJ02219 Injector Nozzle Nut Warranty Instructions

(1) Product Warranty Conditions And Instructions

It is necessary to provide evidences include pictures, videos, or test reports which tested by the injector nozzle nut inspection equipment, and so on, to feed back to the salesman when the injector nozzle nut is abnormal during using.

The abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. Oil leakage etc.

(2) Injector Nozzle Nut Warranty Coverage

- ① After customer receives the **F00RJ02219** injector nozzle nut within 15 days , if there is a performance failure and the product has no damage on surface, customer can choose to replace it or repair it;
- ② If the **F00RJ02219** injector nozzle nut has performance problems during the warranty period (3 months), and it is confirmed to be product's problems after being tested, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;
- ③ If the injector nozzle nut shell has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

⚠ Tips: For products not covered by warranty, Shumatt can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Injector Nozzle Nut Is Not Covered By Warranty

- ① The warranty period has expired.
- ② Injector nozzle nut failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.
- ③ Customer disassembles or repairs the injector nozzle nut personally resulting in damage to the injector nozzle nut.
- ④ Injector nozzle nut damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).
- ⑤ Injector nozzle nut failure or injector nozzle nut damage caused by non-injector nozzle nut design, technology, manufacturing, quality and other issues.
- ⑥ Injector nozzle nut failure due to system pressure exceeding system approved pressure.
- ⑦ Injector nozzle nut failure caused by system voltage exceeding approved voltage.
- ⑧ Injector nozzle nut failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.
- ⑨ Injector nozzle nut failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).
- ⑩ Injector nozzle nut failure caused by not following the installation angle specified in the vehicle engine maintenance manual.
- 11 Injector nozzle nut failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.
- 12 Injector nozzle nut failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.
- 13 Injector nozzle nut failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.
- 14 Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the injector nozzle nut connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.10. F00RJ02219 Injector Nozzle Nut Storage Standard**(1) Choose a Suitable Storage Place**

The warehouse and cargo yard where the injector nozzle nuts are stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict Requirements of Warehousing

Strict inspections should be carried out when the injector nozzle nuts are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injector nozzle nuts must be protected from damage.

(3) Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the injector nozzle nuts placed in the room, and the corrosion of the injector nozzle nuts is significantly reduced.

Injector nozzle nuts must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector nozzle nut is exposed in rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector nozzle nut from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the injector nozzle nut package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ⚠ It is forbidden to leave the injector nozzle nut exposed in the air for a long time.
- ⚠ It is forbidden to store acid, alkali, salt and other substances together with the injector nozzle nut.
- ⚠ The unpacked injector nozzle nut must be rust-proof during secondary storage.

1.11. F00RJ02219 Injector Nozzle Nut Manufacturer

Injector Nozzle Nut Manufacturer: Shenzhen Shumatt Technology Co., Ltd

2. F00RJ02219 Injector Nozzle Nut Technical Support

2.1. F00RJ02219 Injector Nozzle Nut Utilized Location

E.g.: See the injector nozzle nut utilized location as follow

No.	Name
A	Injector Nozzle Nut



2.2. F00RJ02219 Injector Nozzle Nut Installation

(1) F00RJ02219 Injector Nozzle Nut Installation Precautions

① The replacement of the injector nozzle nut must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.

② Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector nozzle nut, the fitting clearance of the injector nozzle nut connection, the installation angle and tightening torque of the injector nozzle nut, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector nozzle nut.

③ When installing the injector nozzle nut on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the injector nozzle nut, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

④ Before installing, check whether the injector nozzle nut washer shim has been replaced and installed on the injector nozzle nut.

⑤ When installing the injector nozzle nut, apply lubricant between the injector nozzle nut, fuel nozzle sealing washer shim and O-ring.

⑥ Without replacing new washer shim can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the injector nozzle nut and nozzle to break and cause damage to the engine.

⑦ When installing the injector nozzle nut on the engine, please carefully check the components related to the installation of the injector nozzle nut, such as the injector nozzle nut pressure plate, screw, injector nozzle nut rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

⑧ It is forbidden to operate the bare injector nozzle nut for a long time in an environment with serious dust pollution and corrosion to iron products.

⑨ It is forbidden to operate the bare injector nozzle nut for a long time in a strong magnetic field environment.

(2) Injector Nozzle Nut Tightening Torque

When installing the injector nozzle nut, the torque wrench and tightening torque data requirement must follow the injector maintenance manual. (50Nm) .



⚠ The nozzle nut tightening torque must be installed according to the tightening torque specified in the injector maintenance manual.

2.3. Reasons of F00RJ02219 Injector Nozzle Nut Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle injector nozzle nut oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the injector nozzle nut of the vehicle.
- (5) The long-term placement of the injector nozzle nut causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

⚠ Before installing, carefully check whether other components in the common rail system are damaged so as to prevent the injector nozzle nut from not working properly after being replaced.

2.4. Causes of F00RJ02219 Injector Nozzle Nut Being Damaged

- (1) Fail to operate properly according to engine maintenance manual during disassembly or installation resulting in damage to the injector nozzle nut .
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector nozzle nut, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector nozzle nut.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the injector nozzle nut and cause damage to the injector nozzle nut.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the injector nozzle nut and causing damage to it.
- (6) The injector nozzle nut is damaged due to replacement or adjustment of the relevant parts of the injector nozzle nut. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector nozzle nut fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the injector nozzle nut.
- (8) The injector nozzle nut will be damaged naturally at the end of its working life.
- (9) The injector nozzle nut is magnetized (injector nozzle nut parts' magnetic exceeded) causing the injector nozzle nut to not work properly.

⚠ Before replacing the injector nozzle nut, please check the engine parts carefully according to the engine maintenance manual to avoid the injector nozzle nut being damaged again after replacement.

2.5. F00RJ02219 Injector Nozzle Nut Technical Support Obtaining Methods


- 1) Injector Nozzle Nut Technical Data: <https://www.injectornut.com/download/>
- 2) Injector Nozzle Nut Videos: <https://www.injectornut.com/videos/>
- 3) Injector Nozzle Nut Encyclopedia: <https://www.injectornut.com/category/news/encyclopedia/>
- 4) Injector Nozzle Nut Information Query Software:

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit <http://shumatt.com> to get the download and installation tutorial.

- 5) YouTube:

Visit https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw to get the technical videos, stay tuned for more information.

2.6. F00RJ02219 Injector Nozzle Nut Measurement Tool

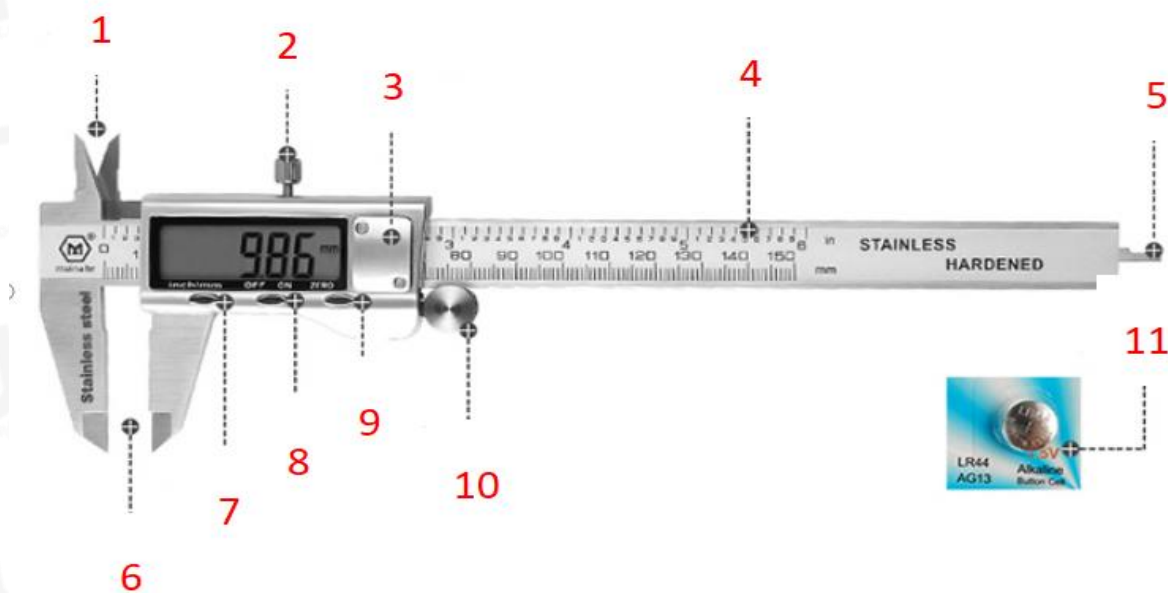

Pic No.5

1. Inner diameter measuring claw	7. inch/mm metric and inch conversion button
2. Limit screw	8. OFF/ON power button
3. Battery installation place	9. ZERO button
4. Ruler body	10. Push roller
5. depth measurement	11. Button battery
6. depth measurement	/

2.7. F00RJ02219 Injector Nozzle Nut Measurement Steps

	
Picture 1 Caliper: CRT085	Picture 2 Caliper: CRT085
Step 1: Choose caliper: CRT085 (Shown in Picture 1)	Step 2: First open the caliper (OFF/ON), then return the display (ZERO) to zero (as shown in Picture 2) ▲The caliper must be adjusted to zero before measuring.
	
Picture 2	Picture 3
Step 3: Measure the height of the F00RJ02219 nozzle nut and place it at the position shown in the picture (Shown in Picture 3) ▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.	Step 4: Measure the outer diameter of the F00RJ02219 nozzle nut and place it at the position shown in the Picture (Shown in Picture 5) ▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.
	
Picture 4	Picture 5
Step 5: Measure the inner diameter of the F00RJ02219 nozzle nut and place it at the position	Step 6: Measure the hexagonal edge-to-edge diameter of the F00RJ02219 nozzle nut and place it at the position

shown in the Picture (Shown in Picture 5)

▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.

shown in the Picture (Shown in Picture 6)

▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.

3. F00RJ02219 Injector Nozzle Nut Purchase and Delivery

3.1. F00RJ02219 Injector Nozzle Nut Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

⚠ Please contact our salesmen for specific payment information.

3.2. F00RJ02219 Injector Nozzle Nut Main Sales Markets

Injector nozzle nut main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3. F00RJ02219 Injector Nozzle Nut Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. F00RJ02219 Injector Nozzle Nut Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. F00RJ02219 Injector Nozzle Nut Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases) .

3.6. F00RJ02219 Injector Nozzle Nut Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days

Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days				

⚠ The logistics time is for reference only and is subject to the actual arrival.

3.7. F00RJ02219 Injector Nozzle Nut Injection Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.1.

International express packaging: Wrapped with waterproof yellow tape after wrapping the black protective film, such as picture No. 2.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3, also, the products can be packaged according to customers' requirements.

⚠ The packing tray is made of plastic and can be recycled.

⚠ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

⚠ Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.

No.	1	2	3
Image			
Name	Domestic Express Packaging	International Express Packaging	Pallet Shipping
Description	Wrapped by transparent tape	Wrapped with yellow tape after wrapping black	Use pallet that meet export requirements, and use white

		protective film	wrapping protective film to wrap and bind with cable ties
--	--	-----------------	---

4.F00RJ01101 Injector Nozzle Nut Storage Standard

(1)Choose a Suitable Storage Place

The warehouse and cargo yard where the injector nozzle nuts are stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2)Strict Requirements of Warehousing

Strict inspections should be carried out when the injector nozzle nuts are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injector nozzle nuts must be protected from damage.

(3)Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the injector nozzle nuts placed in the room, and the corrosion of the injector nozzle nuts is significantly reduced.

Injector nozzle nuts must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4)Stack Properly

After the injector nozzle nut is exposed in rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector nozzle nut from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the injector nozzle nut package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ⚠ It is forbidden to leave the injector nozzle nut exposed in the air for a long time.
- ⚠ It is forbidden to store acid, alkali, salt and other substances together with the injector nozzle nut.
- ⚠ The unpacked injector nozzle nut must be rust-proof during secondary storage.

5.Company Information



Pic No.6

5.1. Company Introduction

Chinese Name: 深圳市舒马特科技有限公司

English Name: Shenzhen Shumatt Technology Co., Ltd

 **Mob Phone/WeChat:** +86-13410541523

 **HK Telephone:** +852-67653519

 **Telephone:** +86-755-23215133

 **Email:** ruby@shumatt.com

 **Website:** www.shumatt.com

 **Shenzhen Office:** 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China Mainland

 **Shenzhen Office:** Exit C, Qiao Touxu Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

 **Hong Kong Office:** Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

 **After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.9. F00RJ02219 Injector Nozzle Nut Warranty Instructions](#))

5.2. Contact Information

Name	WeChat/ WhatsApp	Email
Ruby	+86-13410541523	hison@shumatt.com

6. Copyright Statement

The content, design, logos, and materials contained within the file " **F00RJ02219** Injector Nozzle Nut Technical Data" are the sole property of Shenzhen Shumatt Technology Co. and other respective copyright owners. They are safeguarded by relevant copyright and intellectual property regulations. Any reproduction, distribution, or unauthorized utilization of the content in this file without explicit written consent from Shenzhen Shumatt Technology Co., Ltd is strictly prohibited and could lead to trademark infringement. For any inquiries regarding the use or licensing of content on this website, please reach out to us at hison@shumatt.com.