



F00VC14018 Injector Nozzle Nut Technical Data

SKU1: G1N1F00VC14018

SKU2: G1Y2F00VC14018

G2

G3

G4

CR



DIESEL

Series Injector Nozzle Nut

0445110 0445120 0414 Piezo

F00VC14018 Injector Nozzle Nut Technical Data

Content

1. F00VC14018 Injector Nozzle Nut Introduction.....	2
1.1. F00VC14018 Injector Nozzle Nut Basic Information.....	2
1.2. F00VC14018 Injector Nozzle Nut Common Part Number.....	2
1.3. F00VC14018 Injector Nozzle Nut Parameter	4
1.4. F00VC14018 Injector Nozzle Nut Specifications and Dimensions Parameter.....	4
1.5. F00VC14018 Injector Nozzle Nut Quality Control.....	5
1.6. F00VC14018 Injector Nozzle Nut Customized Service.....	5
1.7. F00VC14018 Injector Nozzle Nut Packing List & Size.....	6
1.8. F00VC14018 Injector Nozzle Nut Testing Standard and Certificate.....	7
1.9. F00VC14018 Injector Nozzle Nut Warranty Instructions	8
1.10. F00VC14018 Injector Nozzle Nut Storage Standard.....	9
1.11. F00VC14018 Injector Nozzle Nut Manufacturer	10
2. F00VC14018 Injector Nozzle Nut Technical Support.....	10
2.1.F00VC14018 Injector Nozzle Nut Utilized Location	10
2.2. F00VC14018 Injector Nozzle Nut Installation	11
2.3. Reasons of F00VC14018 Injector Nozzle Nut Not Working Normally.....	12
2.4. Causes of F00VC14018 Injector Nozzle Nut Being Damaged.....	12
2.5. F00VC14018 Injector Nozzle Nut Technical Support Obtaining Methods	12
2.6. F00VC14018 Injector Nozzle Nut Measurement Tool.....	13
2.7. F00VC14018 Injector Nozzle Nut Measurement Steps.....	13
3. F00VC14018 Injector Nozzle Nut Purchase and Delivery	15
3.1. F00VC14018 Injector Nozzle Nut Purchase Payment Term	15
3.2. F00VC14018 Injector Nozzle Nut Main Sales Markets.....	15
3.3. F00VC14018 Injector Nozzle Nut Declaration Requirements	15
3.4. F00VC14018 Injector Nozzle Nut Shipping Ways	15
3.5. F00VC14018 Injector Nozzle Nut Lead time	15
3.6. F00VC14018 Injector Nozzle Nut Logistics Time for Destination Out of China’ s Areas.....	15
3.7. F00VC14018 Injector Nozzle Nut Injection Packing.....	16
4.F00RJ01101 Injector Nozzle Nut Storage Standard	17
5.Company Information.....	18
5.1. Company Introduction.....	18
5.2. Contact Information	19
6.Copyright Statement.....	19

F00VC14018 Injector Nozzle Nut Technical Data

1. F00VC14018 Injector Nozzle Nut Introduction

1.1. F00VC14018 Injector Nozzle Nut Basic Information

Injector Nozzle Nut Title	Common Rail F00VC14018 Injector Nozzle Nut China Made New
SKU1	G1N1F00VC14018
SKU 2	G1Y2F00VC14018

1.2. F00VC14018 Injector Nozzle Nut Common Part Number

(1) Injector Nozzle Nut Applicable Injector Model

Injector Part Number	Injector Part Number	Injector Part Number	Injector Part Number
0445110008	0445110028	0445110029	0445110030
0445110036	0445110038	0445110044	/

(2) Injector Nozzle Nut Application Information

Brand	Car Model	Engine Model	OE Part Number
CITROEN	Berlingo 2.0 HDi	RHY	1980 71
BMW	740 d	39 8D 1	13 53 7 785 438
BMW	530 d	30 6D 1	13 53 7 785 437
MG	ZT 135 2.0 CDTi	20 4D 2	13 53 2 354 045
CITROEN	C5 2.2 HDi	4HX	96 533 448
RENAULT	Espace III 2.2 dCi	G9T...	82 01 043 564
CHEVROLET	Tracker 2.0 Diesel	DW10ATED	96 408 953

(3) Injector Nozzle Nut Part Number Common Writing

0445110008, 0445110020, 0445110028, 0445110029, 0445110030, 0445110031, 0445110036, 0445110038, 0445110044, 0445110047, 0445110048, 0445110049, 0445110057, 0445110059, 0445110060, 0445110061, 0445110062, 0445110063, 0445110064, 0445110075, 0445110076, 0445110082, 0445110083, 0445110091, 0445110092, 0445110101, 0445110111, 0445110113, 0445110114, 0445110118, 0445110122, 0445110126, 0445110130, 0445110131, 0445110135, 0445110136, 0445110149, 0445110159, 0445110174, 0445110175, 0445110183, 0445110185, 0445110186, 0445110188, 0445110209, 0445110212, 0445110213, 0445110216, 0445110217, 0445110218, 0445110219, 0445110221, 0445110232, 0445110239, 0445110243, 0445110252, 0445110257, 0445110258, 0445110259, 0445110260, 0445110266, 0445110269, 0445110270, 0445110274, 0445110275, 0445110277, 0445110278, 0445110279, 0445110281, 0445110283, 0445110285, 0445110286, 0445110287, 0445110290, 0445110291, 0445110297, 0445110299, 0445110300, 0445110301, 0445110306, 0445110308, 0445110309, 0445110310, 0445110311,

0445110312, 0445110315, 0445110316, 0445110321, 0445110322, 0445110325, 0445110326,
0445110327, 0445110331, 0445110342, 0445110352, 0445110353, 0445110356, 0445110387,
0445110388, 0445110391, 0445110400, 0445110408, 0445110409, 0445110421, 0445110422,
0445110423, 0445110425, 0445110436, 0445110441, 0445110444, 0445110447, 0445110450,
0445110455, 0445110457, 0445110483, 0445110484, 0445110486, 0445110496, 0445110497,
0445110498, 0445110499, 0445110506, 0445110511, 0445110540, 0445110543, 0445110557,
0445110558, 0445110559, 0445110560, 0445110561, 0445110580, 0445110659, 0445110660,
0445110698, 0445110709, 0445110724, 0445110725, 0445110729, 0445110730, 0445110731,
0445110762, 0445110763, 0445110764, 0445110810, 0445110836, F00ZC99051, F00ZC99052,
F00ZC99053, 0445110233, 0445110253, 0445110254, 0445110262, 0445110284, 0445110307,
0445110329, 0445110330, 0445110726, 0445110065, 0445110066, 0445110080, 0445110085,
0445110142, 0445110143, 0445110153, 0445110154, 0445110161, 0445110168, 0445110169,
0445110214, 0445110215, 0445110227, F00ZC99054, F 00Z C99 052, F 00Z C99 053, F 00Z C99 054,
0 445 110 008, 0 445 110 020, 0 445 110 028, 0 445 110 029, 0 445 110 030, 0 445 110 031, 0 445 110 036,
0 445 110 038, 0 445 110 044, 0 445 110 047, 0 445 110 048, 0 445 110 049, 0 445 110 057, 0 445 110 059,
0 445 110 060, 0 445 110061, 0 445 110 062, 0 445 110 063, 0 445 110 064, 0 445 110 075, 0 445110 076,
0 445 110 082, 0 445 110 083, 0 445 110 091, 0 445 110 092, 0 445 110 101, 0 445 110 111, 0 445 110 113,
0 445 110 114, 0 445 110 118, 0 445 110 122, 0 445 110 126, 0 445 110 130, 0 445 110 131, 0 445 110 135,
0 445 110 136, 0 445 110 149, 0 445 110 159, 0 445 110 174, 0 445 110 175, 0 445 110 183, 0 445 110 185,
0 445 110 186, 0 445 110 188, 0 445 110 209, 0 445 110 212, 0 445 110 213, 0 445 110 216, 0 445 110 217,
0 445 110 218, 0 445 110 219, 0 445 110 221, 0 445 110 239, 0 445 110 243, 0 445 110 252, 0 445 110 257,
0 445 110 258, 0 445 110 259, 0 445 110 260, 0 445 110 266, 0 445 110 269, 0 445 110 270, 0 445 110 274,
0 445 110 275, 0 445 110 277, 0 445 110 278, 0 445 110 279, 0 445 110 281, 0 445 110 283, 0 445 110 285,
0 445 110 286, 0 445 110 287, 0 445 110 290, 0 445 110 291, 0 445 110 297, 0 445 110 299, 0 445 110 300,
0 445 110 301, 0 445 110 306, 0 445 110 308, 0 445 110 309, 0 445 110 310, 0 445 110 311, 0 445 110 312,
0 445 110 315, 0 445 110 316, 0 445 110 321, 0 445 110 322, 0 445 110 325, 0 445 110 326, 0 445 110 327,
0 445 110 331, 0 445 110 342, 0 445 110 352, 0 445 110 353, 0 445 110 356, 0 445 110 387, 0 445110 388,
0 445 110 391, 0 445 110 400, 0 445 110 408, 0 445 110 409, 0 445 110 421, 0 445 110 422, 0 445 110 423,
0 445 110 425, 0 445 110 436, 0 445 110 441, 0 445 110 444, 0 445 110 447, 0 445 110 450, 0 445 110 455,
0 445 110 457, 0 445 110 483, 0 445 110 484, 0 445 110 486, 0 445 110 496, 0 445 110 497, 0 445 110 498,
0 445 110 499, 0 445 110 506, 0 445 110 511, 0 445 110 540, 0 445 110 543, 0 445 110 557, 0 445 110 558,
0 445 110 559, 0 445 110 560, 0 445 110 561, 0 445 110 580, 0 445 110 659, 0 445 110 660, 0 445 110 698,
0 445 110 709, 0 445 110 724, 0 445110 725, 0 445 110 729, 0 445 110 730, 0 445 110 731, 0 445 110 762,
0 445 110 763, 0 445110 764, 0 445 110 810, 0 445 110 836, F 00Z C99 051, 1980 71, 96 255 425, 1980 66,
K9625542580, 9625542580, 96 255 425 80, 13 53 7 785 438, 13 53 2 354 000, 13 53 7 785 437,
13 53 2 354 093, MKG 1002 70, 13 53 118, 7 785 205, 96 282 404, 96 364 040, 1980 73, 96 533 457,
96 533 458, 96 533 459, 96 384 447, 96 384 448, 96 384 449, 1980 75, 96 533 44880, 82 00 010 074,
82 01 043 564, 96 375 360, 96 408 953, 1980 72, 1980 93, 9635196580, K9456182480, K9635196580,
9456182480, 15310-67G12, 15310-67G10, 15310 67G00 000, 15310 67G12 000, 15310-67G00,
13 53 7 785 984, 13 53 7 785 573, 13 53 7 785 574, 13 53 7 785 985, 13 53 7 785 983, 93171107,
1353 778598 3, 96 384 889, 96 352 463, 1980 80, 1980 78, 96 416 540, 96 416 541, 1980 79, 96 416 542,
15310-67G30, 15310 67G30 000, 05066 820AA, 15 06 2036F, 510990024, 5066820AA, 057 130 276 D,
96 400 887, 9641945080, K9640088780, K9641945080, 9640088780, 1980 77, 1980 82, 96 640 424,
4402535, 9110535, 82 00 010 075, 77 01 474 032, 33800 27000, 33800 27010Y, 96 386 523, 96 414 961,
1980 89, 1980 H9, 1980 85, 96 419 450, 96 419 449, 96 419 451, 9653594580, K9653594580, 1980 84,

1980 86, 1980 H8, 1980 H7, 96 417 42880, 96 535 94280, 96 535 942, 8-97262-559-1, 8-97262-559-2, 8-97262-559-3, 55184536, 55192096, 55192495, 93177373, 93183910, 15710 84E60 000, 15710-84E60, 33800 4A000, 33800 4A000Y, 55193808, 73503097, 55192534, 55192489, 55190808, 057 130 276 H, 8-97300-091-0, 8-97300-091-1, 8-97300-091-3, 8-97300-091-2, 97300091, 5821086, 13 53 7 788 954, 7 788 812, 13 53 7 788 812, 33800 27900, 33800 279002Y, 13 53 7 789 573, 13 53 7 789 661, 13 53 7 789 670, 13 53 7 787 187, 13 53 7 787 234, 13 53 7 788 609, 96 487 862, 1980 A9, 1980 LO, 96 487 86280, 1980 E5, 96 507 606, 96 485 754, 1254398, 3M5Q9 F593 CA, 96 466 862, 13 53 7 790 630, 7 790 629, 55191958, 55192739, 93184794, 5821100, 93179047, 97363811, 8-97363-811-0, 8-97363-811-2, 8-97363-811-3, 98433635, 97363812, 8-97363-812-2, 8-97363-812-0, 8-97363-812-3, 98433636, 55197875, 55197124, 71794966, 9S51 9F593 BA, 1538758, 93190435, 33800 4A300, 96 528 920, 96 550 450, 1980 H3, 3M5Q9 A593 GA, 3M5Q9 F593 JA, 1326820, 3M5Q9 F593 GA, 1366613, Y604-13H50, 96.528920.80A, 16 098 49380, 96 550 45080, 7 794 435, 13 53 7 794 555, 7 790 117, 13 53 7 794 652, 13 53 7 794 919, 7 791 545, 7 794 434, 7 749 652, 55198219, 55217235, 55192740, 55221021, 13 53 7 793 836, 13 53 7 794 334, 13 53 7 790 093, 7 790 092, 5142 811AA, 05142 811AA, 15 06 2047F, 15 06 2048F, 7 792 096, 13 53 7 793 030, 15 06 2049F, 1980 H2, 96 596 666, 3M5Q 9F593 HB, 1347283, 3M5Q 9F593 HD, 1477146, Y605-13H50-B, 16 098 49180, 96 556 06680, 15310-69K00, 15310 69K00 000, 55221020, 55198218, 55196295, 551 9821 80, z96 565 889, 1980 K2, 96 565 889, 96 565 88980, 33800 27400, 13 53 7 804 978, 1980 J3, 5M5Q 9F593 AA, 1425514, Y606-13H50, 16 098 49580, 96 553 28480, 0305BC0401N, 0305BC0870N, 1353 788573, 96440397, 15 06 2057F, 33800-4A500, 55200259, 33800-4A600, 33800 4A600, 33800 4A100, 33800-4A160, 33800-4A170, 33800 4A150, 96 592 405, 1980 K7, 1980 K9, 96 592 40580, 33800-4A360, 33800 4A350, 33800-4A370, 96 589 498, 6M5Q9 F593 AA, 1445695, 96 589 49880, 15 06 2055F, 50 60 1330, 15 06 2053F, 33800279002Y, 33800 21900, 16 098 507 80, 96 620 02680, 16 098 49780, 55209382, 55221024, 55202251, 15710-79J81, 55206704, 55221023, 55196442, 15 06 2054F, 33800 4A000N, 55208183, 55221022, 5010 090 0, 5010 094 0, 0305BAM00280N, 0305BM0071N, 1980 L1, 16 098 49980, 16600 VZ20A, 15710-86J20, 15710 86J20 000, 55214192, 55209803, 55566498, 93195389, 55214132, 55214159, 55564218, 552141590, 93195390, 55566050, 0821438, 55496735, 0305BB1031N, 9M5Q 9F593 AA, 1633633, FC700-1112100-A38, 35 06 2002F, 837073791, V837073791, 97301878, 55577668, J55577044, 55577044, 571001160101, J55580135, 04123872, 412 3872, 580 147 00 98, 5801470098, FG200-1112100-A38, 0305BAU00381N, 252501160141, 0305BAM00270N, 413 2054, 04132054, 04132002, 413 2002, 252501160140, 580 156 91 41, 5801569141, 35 06 2013F, 0305BAB02221N, 04123831, 412 3831, 04123830, 412 3830, 04132013, 413 2013, 04132014, 413 2014, 0305BAB02451N, SHA9026, 571001160103, FKS00100, 33800 4A500, 33800 4A160, 33800 27010, 33800 4A360

1.3. F00VC14018 Injector Nozzle Nut Parameter

Applicable System: Common Rail System

Injector Nozzle Nut Series: 110 Series

Injector Nozzle Nut Type: Electromagnetic Type

Injector Nozzle Nut Dimensions: 16.9×31.25×M15

1.4. F00VC14018 Injector Nozzle Nut Specifications and Dimensions Parameter

Injector Nozzle Nut Size: $6*5*5\text{cm} = 150\text{cm}^3$ (L*W*H=V)

Single Injector Nozzle Nut Weight: 25g

Injector Nozzle Nut Weight Per Box: 300g

Injector Nozzle Nut Quality: China Made New

Injector Nozzle Nut Package Size: 16cm* 10cm *6cm=960cm³ (L*W*H=V)

Injector Nozzle Nut Type: High Pressure Common Rail Injector Nozzle Nut

Injector Nozzle Nut MOQ: 1pcs

1.5. F00VC14018 Injector Nozzle Nut Quality Control

(1) Injector Nozzle Nut Testing

All parts of the injector nozzle nut have undergone electrical characteristics testing, precision testing, high temperature testing, low temperature testing, withstand pressure testing, leakage testing, durability testing, and various working conditions testing.

(2) Injector Nozzle Nut Installation

In addition, the injector nozzle nut production and installation process is quality controlled. Our company strictly follows the standard product installation data and product installation steps for installation, such as injector nozzle nut stroke test, injector nozzle nut solenoid valve tightening torque, injector nozzle nut nozzle tightening torque.

(3) Injector Nozzle Nut Inspection

The factory inspection of the injector nozzle nut has undergone three inspections: full inspection, random inspection, and batch inspection. Different brands of test benches are used to test the same injector nozzle nut for more than three times for factory inspection, and the fuel injector nozzle nut installation testing environment are progressed in dust-free workshop.

1.6. F00VC14018 Injector Nozzle Nut Customized Service

(1) **Injector Nozzle Nut Customized Service Coverage:** Meet OEM manufacturers' customization needs for shell engraving, logo engraving, injector nozzle nut internal packaging, injector nozzle nut external packaging and labels, etc.

No.	1	2
Image		
Name	Injector Nozzle Nut Packing	Color Customization: Gray, Black, White

(2) Injector Nozzle Nut Customized Service Requirements:

The purchase of customized injector nozzle nut is no less than 10 pieces.

The purchase of customized injector nozzle nut boxes is no less than 1000 pieces.

▲ When the Customized products involve the need of specify logo, the OEM manufacturer is asked to provide trademark authorization and the sample of logo image file.

▲ Once the customized injector nozzle nut is sold, it can't be returned or exchanged if there is no quality problems.

1.7. F00VC14018 Injector Nozzle Nut Packing List & Size

(1) Injector Nozzle Nut Spare Parts List

No.	1	2	3
Image			
Name	Injector Nozzle Nut	Injector Nozzle Nut Height	Injector Nozzle Nut Outer Diameter
Description	/	Height: 31.25mm	Outer diameter: 16.9mm
No.	4	5	/
Image			/
Name	Injector Nozzle Nut Inside Diameter	Injector Nozzle Nut Lining	/
Description	Inside diameter M15	Prevent bumping damage to the nozzle nut	/

⚠ Minors are prohibited from using the injector nozzle nut assembly, O-ring, nozzle protective cover, injector nozzle nut shell protective cover, oil return protective cover, VCI anti-rust bag, and bubble bag to avoid personal injury.

⚠ O-rings and nozzle washer shim are disposable installation accessories and need to be replaced when installed again.

⚠ The nozzle protective cover, injector nozzle nut shell protective cover, and oil return protective cover are recyclable accessories and can be reused.

⚠ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

⚠ The injector nozzle nut and the installation part duct must be treated with appropriate sealing oil during installation.

(2) Injector Nozzle Nut Packing Size



Pic No.1

No.	Name	Injector Nozzle Nut Packing Size (cm)
1	Injector Nozzle Nut Box	16*10*6

1.8. F00VC14018 Injector Nozzle Nut Testing Standard and Certificate

Shumatt can provide the factory quality inspection test report of each injector nozzle nut to ensure that each injector nozzle nut delivered meets the engine performance indicators.

BOTEN		测试报告		4.05.2019 10:42:09	
企业名称: _____ 电话: _____ 地址: _____ 传真: _____ 检测人: _____ 客户地址: _____ 检测单位: _____ 电话: _____ 客户姓名: _____ 传真: _____ 检测描述: _____ 检测名称: 检测器 型号-零件号: _____ 制造商: _____					
检测结果					
检测器型号: C05002-0511 检测器名称: 检测器 检测器数量: 1 检测器位置: 检测器 检测器状态: 检测器					
LEAK TEST:	3.8	0.5	0.5	0.5	✓
Back:	3.8	0.5	0.5	0.5	✓
WPRM:	3.8	0.5	0.5	0.5	✗
Max:	29.5	29.5	29.5	29.5	✓
TL:	28.4	28.4	28.4	28.4	✓
EL:	14.1	14.1	14.1	14.1	✓
VE:	4.7	4.7	4.7	4.7	✓
检测器编号: ch1 ch2 ch3 ch4 ch5 ch6 ch7 ch8 ch9 ch10 检测器编号: _____ ☐ 检测器 ☐ 检测器					

Pic No.2

1.9. F00VC14018 Injector Nozzle Nut Warranty Instructions

(1) Product Warranty Conditions And Instructions

It is necessary to provide evidences include pictures, videos, or test reports which tested by the injector nozzle nut inspection equipment, and so on, to feed back to the salesman when the injector nozzle nut is abnormal during using.

The abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. Oil leakage etc.

(2) Injector Nozzle Nut Warranty Coverage

- ① After customer receives the **F00VC14018** injector nozzle nut within 15 days , if there is a performance failure and the product has no damage on surface, customer can choose to replace it or repair it;
- ② If the **F00VC14018** injector nozzle nut has performance problems during the warranty period (3 months), and it is confirmed to be product's problems after being tested, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;
- ③ If the injector nozzle nut shell has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

⚠ Tips: For products not covered by warranty, Shumatt can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Injector Nozzle Nut Is Not Covered By Warranty

- ① The warranty period has expired.
- ② Injector nozzle nut failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.
- ③ Customer disassembles or repairs the injector nozzle nut personally resulting in damage to the injector nozzle nut.
- ④ Injector nozzle nut damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).
- ⑤ Injector nozzle nut failure or injector nozzle nut damage caused by non-injector nozzle nut design, technology, manufacturing, quality and other issues.
- ⑥ Injector nozzle nut failure due to system pressure exceeding system approved pressure.
- ⑦ Injector nozzle nut failure caused by system voltage exceeding approved voltage.
- ⑧ Injector nozzle nut failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.
- ⑨ Injector nozzle nut failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).
- ⑩ Injector nozzle nut failure caused by not following the installation angle specified in the vehicle engine maintenance manual.
- 11 Injector nozzle nut failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.
- 12 Injector nozzle nut failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.
- 13 Injector nozzle nut failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.
- 14 Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the injector nozzle nut connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.10. F00VC14018 Injector Nozzle Nut Storage Standard**(1) Choose a Suitable Storage Place**

The warehouse and cargo yard where the injector nozzle nuts are stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict Requirements of Warehousing

Strict inspections should be carried out when the injector nozzle nuts are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injector nozzle nuts must be protected from damage.

(3) Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the injector nozzle nuts placed in the room, and the corrosion of the injector nozzle nuts is significantly reduced.

Injector nozzle nuts must be stored in the warehouse, and they are forbidden to store in the same

warehouse with commodities with high water content.

(4) Stack Properly

After the injector nozzle nut is exposed in rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector nozzle nut from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the injector nozzle nut package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ⚠ It is forbidden to leave the injector nozzle nut exposed in the air for a long time.
- ⚠ It is forbidden to store acid, alkali, salt and other substances together with the injector nozzle nut.
- ⚠ The unpacked injector nozzle nut must be rust-proof during secondary storage.

1.11. F00VC14018 Injector Nozzle Nut Manufacturer

Injector Nozzle Nut Manufacturer: Shenzhen Shumatt Technology Co., Ltd

2. F00VC14018 Injector Nozzle Nut Technical Support

2.1.F00VC14018 Injector Nozzle Nut Utilized Location

E.g.: See the injector nozzle nut utilized location as follow

No.	Name
A	Injector Nozzle Nut



Pic No.3

2.2. F00VC14018 Injector Nozzle Nut Installation

(1) F00VC14018 Injector Nozzle Nut Installation Precautions

① The replacement of the injector nozzle nut must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.

② Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector nozzle nut, the fitting clearance of the injector nozzle nut connection, the installation angle and tightening torque of the injector nozzle nut, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector nozzle nut.

③ When installing the injector nozzle nut on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the injector nozzle nut, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

④ Before installing, check whether the injector nozzle nut washer shim has been replaced and installed on the injector nozzle nut.

⑤ When installing the injector nozzle nut, apply lubricant between the injector nozzle nut, fuel nozzle sealing washer shim and O-ring.

⑥ Without replacing new washer shim can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the injector nozzle nut and nozzle to break and cause damage to the engine.

⑦ When installing the injector nozzle nut on the engine, please carefully check the components related to the installation of the injector nozzle nut, such as the injector nozzle nut pressure plate, screw, injector nozzle nut rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

⑧ It is forbidden to operate the bare injector nozzle nut for a long time in an environment with serious dust pollution and corrosion to iron products.

⑨ It is forbidden to operate the bare injector nozzle nut for a long time in a strong magnetic field environment.

(2) Injector Nozzle Nut Tightening Torque

When installing the injector nozzle nut, the torque wrench and tightening torque data requirement must follow the injector maintenance manual. (50Nm) .



Pic No.4

⚠ The nozzle nut tightening torque must be installed according to the tightening torque specified in the

2.3. Reasons of F00VC14018 Injector Nozzle Nut Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle injector nozzle nut oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the injector nozzle nut of the vehicle.
- (5) The long-term placement of the injector nozzle nut causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

⚠ Before installing, carefully check whether other components in the common rail system are damaged so as to prevent the injector nozzle nut from not working properly after being replaced.

2.4. Causes of F00VC14018 Injector Nozzle Nut Being Damaged

- (1) Fail to operate properly according to engine maintenance manual during disassembly or installation resulting in damage to the injector nozzle nut .
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector nozzle nut, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector nozzle nut.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the injector nozzle nut and cause damage to the injector nozzle nut.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the injector nozzle nut and causing damage to it.
- (6) The injector nozzle nut is damaged due to replacement or adjustment of the relevant parts of the injector nozzle nut. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector nozzle nut fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the injector nozzle nut.
- (8) The injector nozzle nut will be damaged naturally at the end of its working life.
- (9) The injector nozzle nut is magnetized (injector nozzle nut parts' magnetic exceeded) causing the injector nozzle nut to not work properly.


⚠ Before replacing the injector nozzle nut, please check the engine parts carefully according to the engine maintenance manual to avoid the injector nozzle nut being damaged again after replacement.

2.5. F00VC14018 Injector Nozzle Nut Technical Support Obtaining Methods

- 1) Injector Nozzle Nut Technical Data: <https://www.injectornut.com/download/>

- 2) Injector Nozzle Nut Videos: <https://www.injectornut.com/videos/>
- 3) Injector Nozzle Nut Encyclopedia: <https://www.injectornut.com/category/news/encyclopedia/>
- 4) Injector Nozzle Nut Information Query Software:
TruckBook Parts EPC APP, Android/Apple App Store download and install, visit <http://shumatt.com> to get the download and installation tutorial.
- 5) YouTube:
Visit https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw to get the technical videos, stay tuned for more information.

2.6. F00VC14018 Injector Nozzle Nut Measurement Tool

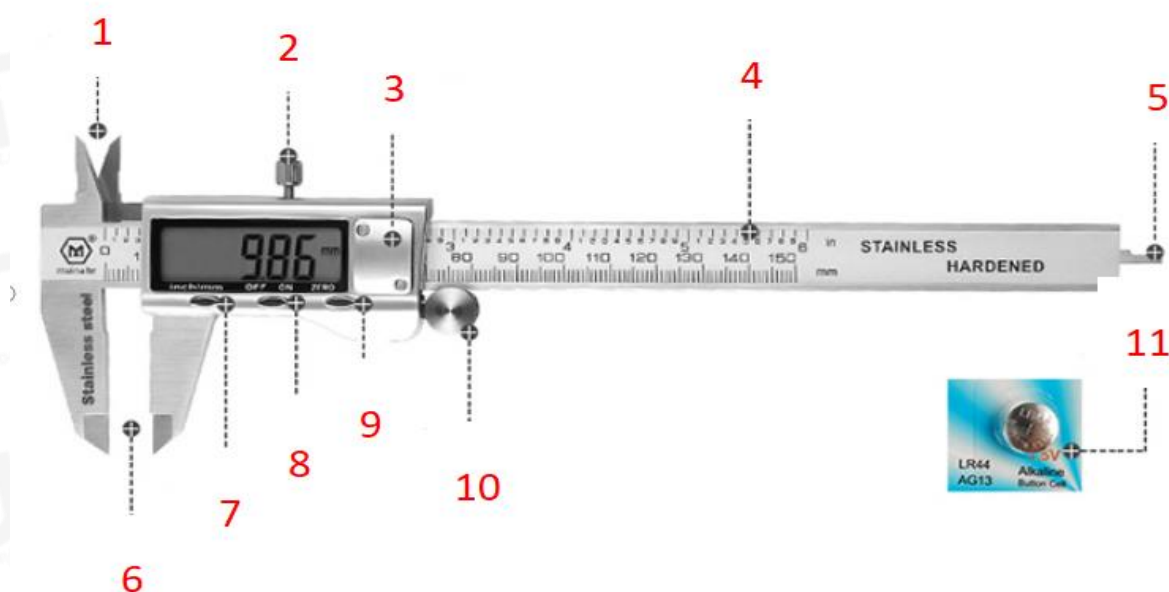

Pic No.5

1. Inner diameter measuring claw	7. inch/mm metric and inch conversion button
2. Limit screw	8. OFF/ON power button
3. Battery installation place	9. ZERO button
4. Ruler body	10. Push roller
5. depth measurement	11. Button battery
6. depth measurement	/

2.7. F00VC14018 Injector Nozzle Nut Measurement Steps

	
Picture 1 Caliper: CRT085	Picture 2 Caliper: CRT085
Step 1: Choose caliper: CRT085 (Shown in Picture 1)	Step 2: First open the caliper (OFF/ON), then return the display (ZERO) to zero (as shown in Picture 2) ▲The caliper must be adjusted to zero before measuring.
	
Picture 2	Picture 3
Step 3: Measure the height of the F00VC14018 nozzle nut and place it at the position shown in the picture (Shown in Picture 3) ▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.	Step 4: Measure the outer diameter of the F00VC14018 nozzle nut and place it at the position shown in the Picture (Shown in Picture 5) ▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.
	
Picture 4	Picture 5
Step 5: Measure the inner diameter of the F00VC14018 nozzle nut and place it at the position	Step 6: Measure the hexagonal edge-to-edge diameter of the F00VC14018 nozzle nut and place it at the position

shown in the Picture (Shown in Picture 5) ▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.	shown in the Picture (Shown in Picture 6) ▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.
--	--

3. F00VC14018 Injector Nozzle Nut Purchase and Delivery

3.1. F00VC14018 Injector Nozzle Nut Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

⚠ Please contact our salesmen for specific payment information.

3.2. F00VC14018 Injector Nozzle Nut Main Sales Markets

Injector nozzle nut main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3. F00VC14018 Injector Nozzle Nut Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. F00VC14018 Injector Nozzle Nut Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. F00VC14018 Injector Nozzle Nut Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases) .

3.6. F00VC14018 Injector Nozzle Nut Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days

Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days				

⚠ The logistics time is for reference only and is subject to the actual arrival.

3.7. F00VC14018 Injector Nozzle Nut Injection Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.1.

International express packaging: Wrapped with waterproof yellow tape after wrapping the black protective film, such as picture No. 2.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3, also, the products can be packaged according to customers' requirements.

⚠ The packing tray is made of plastic and can be recycled.

⚠ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

⚠ Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.

No.	1	2	3
-----	---	---	---

Image			
Name	Domestic Express Packaging	International Express Packaging	Pallet Shipping
Description	Wrapped by transparent tape	Wrapped with yellow tape after wrapping black protective film	Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.F00RJ01101 Injector Nozzle Nut Storage Standard

(1)Choose a Suitable Storage Place

The warehouse and cargo yard where the injector nozzle nuts are stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2)Strict Requirements of Warehousing

Strict inspections should be carried out when the injector nozzle nuts are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injector nozzle nuts must be protected from damage.

(3)Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the injector nozzle nuts placed in the room, and the corrosion of the injector nozzle nuts is significantly reduced.

Injector nozzle nuts must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4)Stack Properly

After the injector nozzle nut is exposed in rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector nozzle nut from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the injector nozzle nut package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ⚠ It is forbidden to leave the injector nozzle nut exposed in the air for a long time.
- ⚠ It is forbidden to store acid, alkali, salt and other substances together with the injector nozzle nut.
- ⚠ The unpacked injector nozzle nut must be rust-proof during secondary storage.

5. Company Information



Pic No.6

5.1. Company Introduction

Chinese Name: 深圳市舒马特科技有限公司

English Name: Shenzhen Shumatt Technology Co., Ltd

 **Mob Phone/WeChat:** +86-13410541523

 **HK Telephone:** +852-67653519

 **Telephone:** +86-755-23215133

 **Email:** ruby@shumatt.com

 **Website:** www.shumatt.com

 **Shenzhen Office:** 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China Mainland

 **Shenzhen Office:** Exit C, Qiao Touxu Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

 **Hong Kong Office:** Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

 **After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.9. F00VC14018 Injector Nozzle Nut Warranty Instructions](#))

5.2. Contact Information

Name	WeChat/ WhatsApp	Email
Ruby	+86-13410541523	hison@shumatt.com

6. Copyright Statement

The content, design, logos, and materials contained within the file "**F00VC14018** Injector Nozzle Nut Technical Data" are the sole property of Shenzhen Shumatt Technology Co. and other respective copyright owners. They are safeguarded by relevant copyright and intellectual property regulations. Any reproduction, distribution, or unauthorized utilization of the content in this file without explicit written consent from Shenzhen Shumatt Technology Co., Ltd is strictly prohibited and could lead to trademark infringement. For any inquiries regarding the use or licensing of content on this website, please reach out to us at hison@shumatt.com.